

Exhaust Gas and Wheel Space Thermocouples

FOR FRAME 5, 6, 7, AND 9 GAS TURBINE APPLICATIONS

**POWER
& INDUSTRIAL**


THERMOCOUPLE

AMETEK Exhaust Gas (EGT) and Wheel Space Frame Turbine Thermocouples meet the specific operational and performance requirements for **REPLACEMENT** and **RETROFIT** Frame gas turbine applications. AMETEK's expertise in solving creep, stress, rupture, corrosion, EMF drift, and other problems affecting sensor performance has resulted in a robust line of single and dual element thermocouple designs. Typical applications include wheel space and exhaust gas temperature monitoring.

AMETEK EGT and Wheel Space Thermocouples use Type K wire with MgO insulation and stainless steel sheathing. The thermocouple probe tips and terminations are hermetically sealed against exposure to operational environments and have been qualified to ASTM E585 and ASTM E608 standards, with a leak rate of less than 1×10^{-6} cc/sec.

For exhaust gas applications, AMETEK manufactures production-qualified radiation shields. These shields, together with AMETEK EGT Thermocouples, form a system that controls thermocouple immersion depth, eliminates fretting due to vibration, and provides improved turbine performance.

AMETEK can provide kits to **RETROFIT** older Frame turbines with this improved thermocouple and radiation shield configuration. Contact AMETEK for a cross-reference list that contains hundreds of different thermocouple, radiation shield, and retrofit kit part numbers.

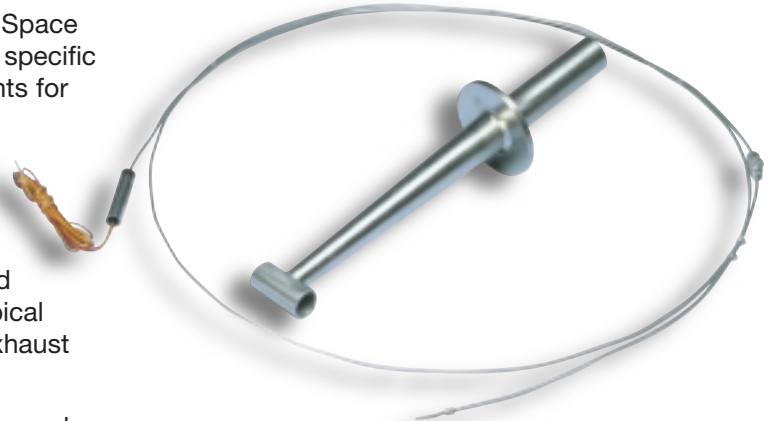

FEATURES AND BENEFITS

- Hermetically-sealed single and dual junction configurations
- Exhaust gas temperature systems prevent:
 - Mechanical probe damage at installation*
 - Tip vibration during normal operation*
- Rapid time response
- Cost-effective retrofit capability
- AMETEK quality, OEM experience, and worldwide service



AMETEK[®]

**POWER
INSTRUMENTS**

Experience the Power™

SPECIFICATIONS

Time Response

- Below 1.3 sec for 0.125 tip diameters
- Below 0.8 sec for 0.0625 tip diameters

Calibration

- ± 0.75% for Type K thermocouples
- ± 0.4% for all exhaust gas temperature thermocouples

Hermetic Seal

- 1×10^{-6} cc/sec

Temperature at Environmental Seal


- -70° to 400°F (-57° to 204°C)

Lengths

- Various from 60" to 500"

Sheath Diameters

- 0.062" to 0.125"

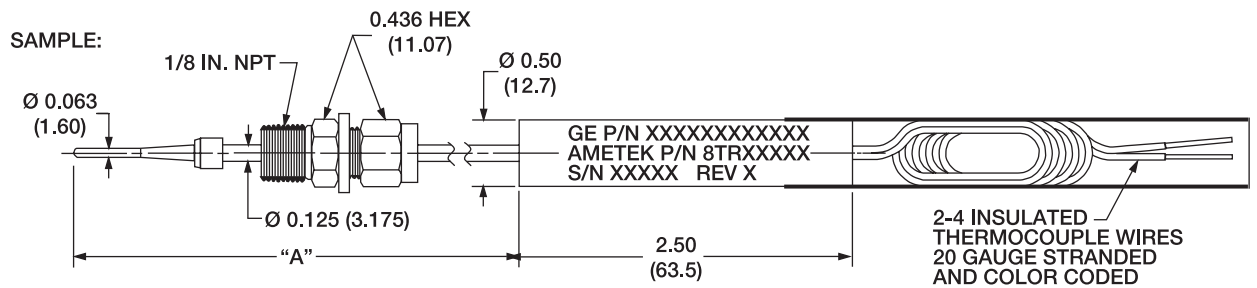

NOTE: Dimension (A) varies between 60 and 500 inches depending on the part number ordered.

IN
(MM)



For customer support call:

**AMETEK
POWER INSTRUMENTS**
50 Fordham Road
Wilmington, MA 01887
Tel: 978.988.4903
Fax: 978.988.4990
power.sales@ametek.com

HEADQUARTERS
AMETEK Power Instruments
50 Fordham Road
Wilmington, MA 01887
Tel: 978.988.4903
Fax: 978.988.4990
power.sales@ametek.com

EUROPEAN HEADQUARTERS
Unit 20, Ridgeway
Donibristle Industrial Estate
Dalgety Bay, Dunfermline, KY119JN
Scotland U.K.
Tel: 44.1383.825630
Fax: 44.1383.825715
power.sales@ametek.com

ASIA PACIFIC HEADQUARTERS
10 Ang Mo Kio Street 65
#05-12 Techpoint
Singapore 569059
Tel: 65.6484.2388
Fax: 65.6481.6588



ISO 9001 Certified